






Device dimensions

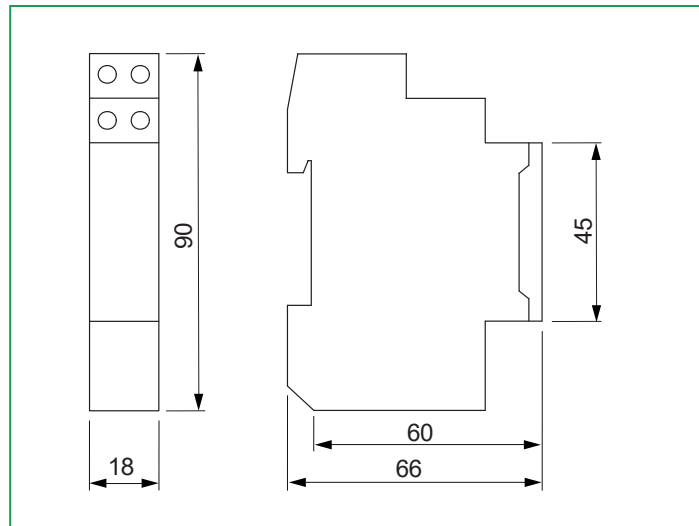

Connection diagram

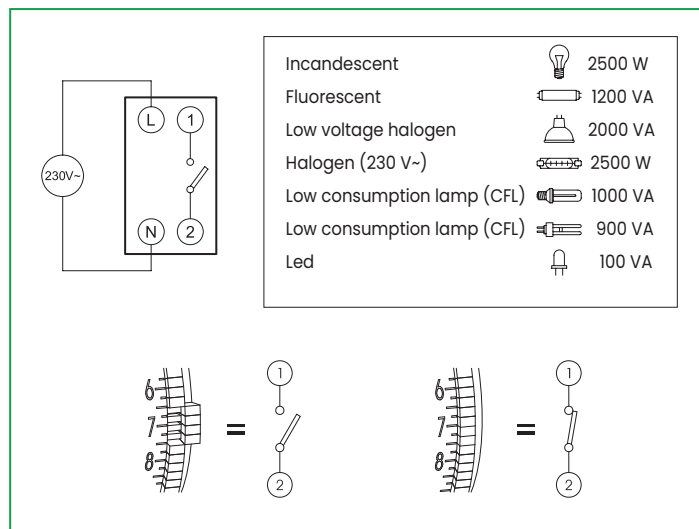

Device description

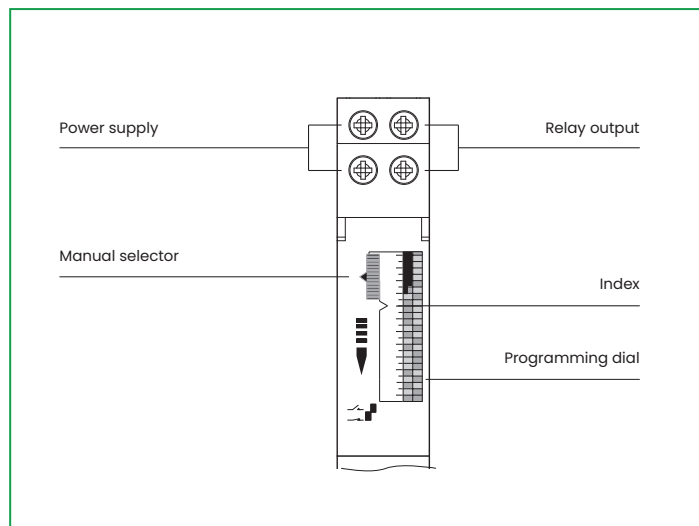

User Manual

Read all the instructions carefully

ANALOG TIME SWITCH WITH TRIPPERS

The **TE 10D** time switches control any electrical installation by means of daily program. They are designed for household and similar operation with normal pollution levels.

Code	Model	Description
4G000100	TE 10D	Daily analog time switch with power reserv

SAFETY WARNINGS


- 1) The instrument must be installed and activated by qualified personnel, following the connection diagrams provided in this manual scrupulously.
- 2) After installation, it must be made impossible to access the terminals without specific tools
- 3) Before accessing the connection terminals, verify that the leads are not live
- 4) Do not connect or power the instrument if any part of it is damaged
- 5) The instrument must be installed and activated in compliance with current electric systems standards.
- 6) Do not use the instrument for purposes other than those indicated

TECHNICAL SPECIFICATIONS

- Power supply: 230 V~ 50/60 Hz
- Power consumption: 0.5 W
- Switching capability: 16 (4) A 250 V~
- Operating accuracy: ± 1 second/day at 22°C
- Type of dial: 96 pins
- Minimum time of functioning: 15 minutes
- Switching accuracy: ± 5 minutes
- Manual control by 3 positions selector:
 - O - Permanent disconnected (the set schedule will be ignored)
 - ⊕ - Automatic operation
 - I - Permanent connected (the set schedule will be ignored)
- Power reserve: 100 hours (NiMH rechargeable battery)
- Operating temperature: -10 °C \div +45 °C
- Protection class: II
- Protection category: IP20
- 1 DIN module container

PROGRAMMING

- Lift the transparent protective cover, located on the front of the time switch, using the lower notch.
- Program the intervention of the time switch within 24 hours (turn the dial in the direction indicated by the arrow on the front of the switch) positioning the small trippers with a horizontal movement from right to left.



- Each small stand corresponds to 15 minutes of functioning.
- The number of the moved small trippers determines the duration of the functioning.
- Set the current time by acting directly on the toothed part of the dial, turning it in the direction indicated by the arrow on the front.
- Set the operating mode using the manual selector.
- Close the protective cover in its housing.
- Power the product.

Reference Standards

07-2025

- Compliance with Community Directives 2014/35/UE (LVD) and 2014/30/UE (EMCD) is declared with reference to the harmonised standards: • EN 60730-2-7 • EN 62479



information to users pursuant to art. 14 of the directive 2012/19 / EU of the european parliament and of the council of 4 july 2012 on waste electrical and electronic equipment (WEEE)

If the crossed-out bin symbol appears on the equipment or packaging, this means the product must not be included with other general waste at the end of its working life.

The user must take the worn product to a sorted waste center, or return it to the retailer when purchasing a new one.

Products for disposal can be consigned free of charge (without any new purchase obligation) to retailers with a sales area of at least 400 m², if they measure less than 25 cm.

An efficient sorted waste collection for the environmentally friendly disposal of the used device or its subsequent recycling, helps avoid the potential negative effects on the environment and people's health, and encourages the re-use and/or recycling of the construction materials.